



Chamäleon GmbH
Rudolf-Diesel-Straße, 8a
69115 Heidelberg-Germany
Tel.: +49-(0)-6221 520440
Fax: +49-(0)-6221 520449
E-mail: info@chamaeleon/produktion.de
<http://www.chamaeleon/produktion.de>

TECHNICAL DATA SHEET

1K WASH PRIMER

- Article number:** **26022**
- Intended use:** Car refinishing Product/ Lacquer
- General characteristics:** 1K Wash Primer has excellent adhesive properties, especially on polished metal, e.g. steel plate. Active rust protection pigments ensure optimum corrosion protection. Quick drying. Can also be used as a welding primer.
For best possible preparation of metal substrates, use Silicone Remover for thorough precleaning. 2K Primer is our recommendation for an ideal secondary product.
- Application areas:** Ideal for spot and part painting
- Quality and properties:**
- 1K acid primer, welder primer
 - Can be used for spot repairs and refinishing parts
 - Simple, time-saving application
 - Fast drying time
 - Excellent corrosion protection
 - Very good adhesion, especially on bare sanded metal
- Physical and chemical characteristics:**
- **Basis of binder:** NC
 - **Colour:** red brown
 - **Smell:** solvent
 - **Efficiency:** 1 m²
 - **Substrate:** sanded: blank metall, cured paintings, primer for refinishing parts, polyester substrates, aluminium. Galvanised sheet metals with 3- layer structure
 - **Temperature resistance:** to 90 °C
 - **Storage stability:** 10 years if appropriate storage provided (=10°-25°C, relative air humidity of max. 60%)
 - **Size:** Aerosol cans, maximum nominal volume 400 ml
 - **VOC value:** 270,5g



Chamäleon GmbH
Rudolf-Diesel-Straße, 8a
69115 Heidelberg-Germany
Tel.: +49-(0)-6221 520440
Fax: +49-(0)-6221 520449
E-mail: info@chamaeleon/produktion.de
<http://www.chamaeleon/produktion.de>

Environment and labelling:

Environmentally sound: 1K Wash primer is 100% free of heavy metals. The caps and packagings are made of recyclable material.

Disposal: Only the completely emptied cans should be put into the recycling skip or appropriate container for reclaimable refuse. Cans which are not empty should be disposed off as "special refuse".


Marking/Labelling: All products comply with the actual labelling regulations according to Preparation Guideline 1999/45/EG. All aerosols correspond to TRGS 200 and TRG 300 as well as to aerosol guideline 75/324/EWG in the actually valid version.

Using instructions:

Before use, carefully read and observe the warning texts on the label!

Application

- 1-2 coats, when used as a primer
- Air for 10-50 minutes (20 ° C), then recoat with 1K fillers or 2K hi-speed primer
- One light coat when used as a welding primer
- Remove all rust damaged area, clean surface thoroughly and sand.
- Area must be dry and free of grease and dust
- Clean undercoat with silicone remover
- Shake the can well for 2 minutes
- Carry out test spray
- For professional use only
- Wear an appropriate respirator (recommended type A2/P3)

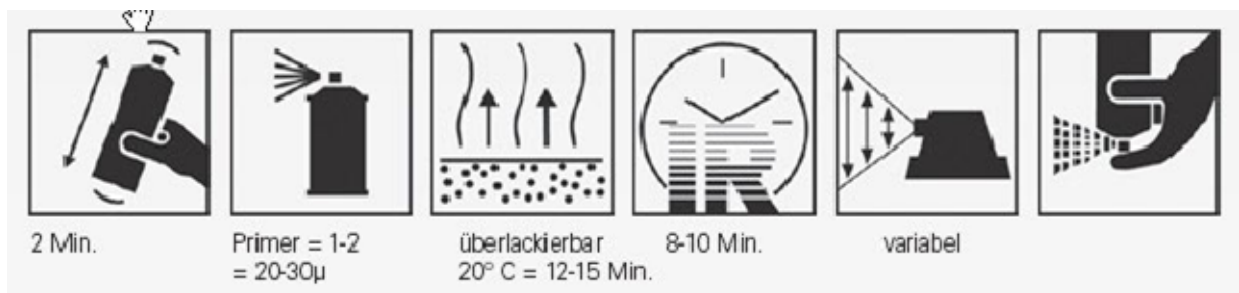

Data: 4, September 2014

This release replaces all eventually earlier issued versions.

***For the additional information that is not included to the Technical Data Sheet apply to the supplier: e-mail: info@chamaeleon-produktion.de
See information on safety in Safety Data Sheet.***